


RH 3 X

Options Optionen

- > Mounting plates
Montageplatten
- > Flushing heads
Spülköpfe
- > Weight reduced version
Gewichtsreduzierte Version

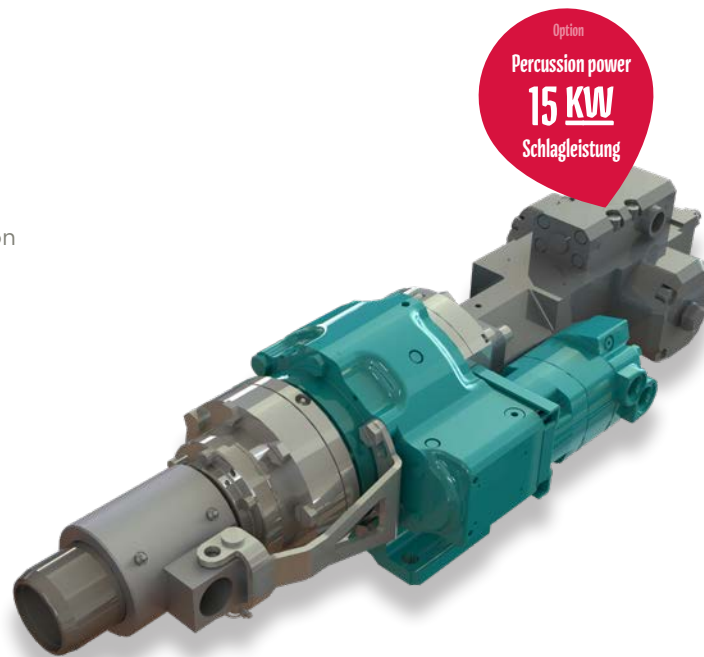

X-SERIES



VIBRATION HEADS



CORING HEADS





DOUBLE HEAD DRILLING SYSTEMS



ROTARY HEADS FOR PILE RIGS



DRILLING ACCESSORIES

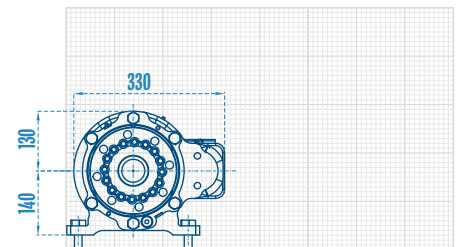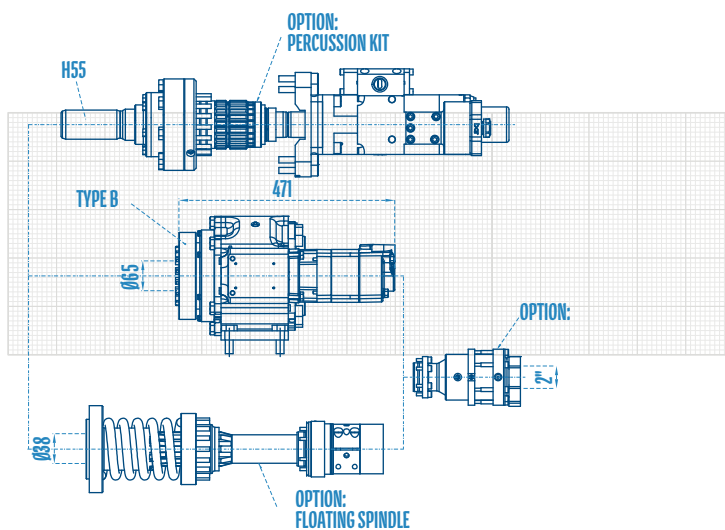

Technical Specifications are subject to modifications without prior notice and incurring responsibility for machines previously sold. The shown machines may have optional equipment. Technical data do not consider power losses. Error misprints reserved. / Technische Änderungen ohne Vorankündigung und Verpflichtung gegenüber früher gelieferten Geräten. Die abgebildeten Geräte können Sonderausstattungen haben. Technische Daten ohne Berücksichtigung des Wirkungsgrades. Irrtum und Druckfehler vorbehalten.



95 - 165 kg **Weight** Gewicht · 100 kN **Traction** Zugkraft

Rotary mechanism RH 3 X Drehantrieb

Standard motors Standard Motoren

Motor Type Motor Typ	Motor Type		
	100	103	105
Gear Gang	1	1	1
Torque Drehmoment	880	1650	2500
Rotation Drehzahl	270	145	96

p = 200 bar & Q = 75 l/min

Percussion unit Type 20 Schlagwerk

Operating pressure Arbeitsdruck	bar	160 - 200
Oil capacity Ölmenge	l/min	40 - 55
Single blow energy Einzelschlagenergie	Nm	... 320
No. of blows Schlagfrequenz	min ⁻¹	... 2500

Shank adapters Einsteckenden

- > H55 LH / RH
- > H64 LH / RH & H66 / R38
- > R32, R38, R51, T38, T45 & T76, IB30, IB40 & IB52

Other shank adapters on request
Weitere Einsteckenden auf Anfrage

Percussion unit ED 15 Schlagwerk

Operating pressure Arbeitsdruck	bar	... 200
Oil capacity Ölmenge	l/min	... 95
Percussion power Schlagleistung	KW	... 15
No. of blows Schlagfrequenz	Hz	... 75