


DH4

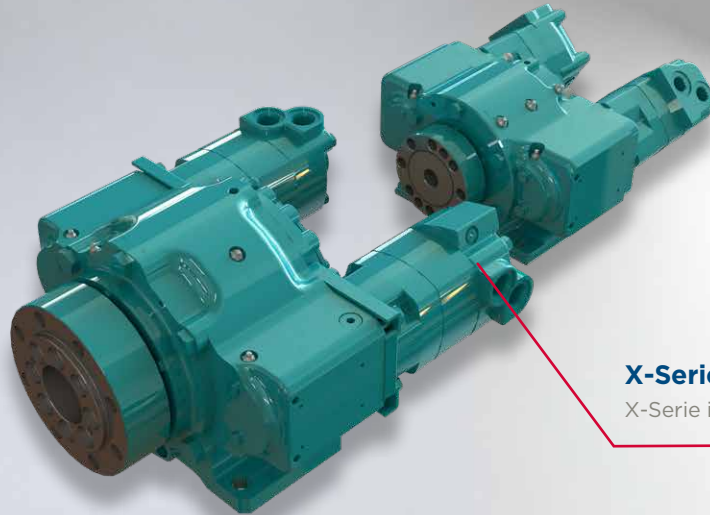


X-Series integrated

X-Serie integriert

Options Optionen

- > Hydraulic, electric or manual shifting
Hydraulische, elektrische oder manuelle Schaltung
- > Floating spindle
Floating Spindel
- > Drilling accessories
Bohrzubehör
- > Mounting plates
Montageplatten
- > Percussion unit type 10
Schlagwerk Typ 10

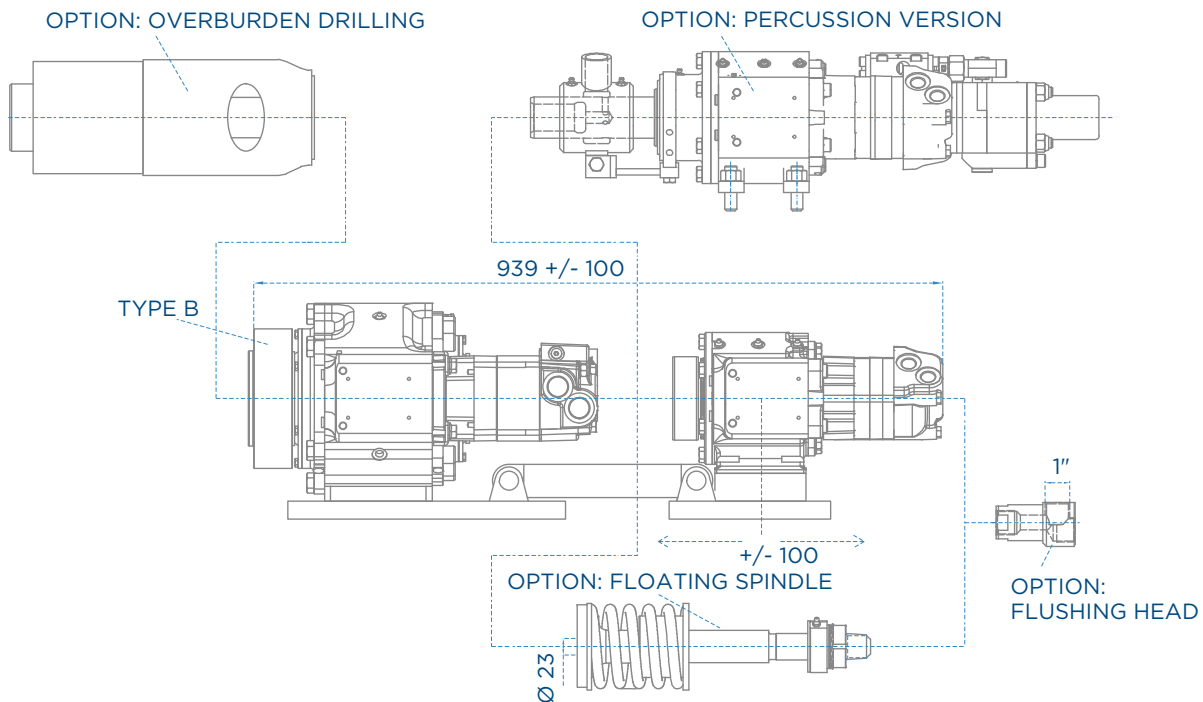

Technical Specifications are subject to modifications without prior notice and incurring responsibility for machines previously sold. The shown machines may have optional equipment. Technical data do not consider power losses. Error misprints reserved. / Technische Änderungen ohne Vorankündigung und Verpflichtung gegenüber früher gelieferten Geräten. Die abgebildeten Geräte können Sonderausstattungen haben. Technische Daten ohne Berücksichtigung des Wirkungsgrades. Irrtum und Druckfehler vorbehalten.



185 – 215 kg Weight Gewicht · 100 kN Traction Zugkraft

Gear box 1 / Casing RH4X Getriebe 1 / Rohr

Motor Type Motor Typ	Gear Gang	103		105	
		1	2	1	2
Torque Drehmoment Rotation Drehzahl	Nm	3300	1650	5000	2500
	min⁻¹	96	192	64	128
p = 200 bar & Q = 100 l/min					

Gear box 2 / Inner rod RH2X Getriebe 2 / Innengestänge

Motor Type Motor Typ	Gear Gang	87		88	
		1	2	1	2
Torque Drehmoment Rotation Drehzahl	Nm	1740	860	2120	1060
	min⁻¹	92	184	75	150
p = 200 bar & Q = 50 l/min					

Option percussion unit Option Schlagwerk

Operating pressure Arbeitsdruck Oil capacity Ölmenge Single blow energy Einzelschlagenergie No. of blows Schlagfrequenz	Type Typ	10
	bar	140 - 180
	l/min	25 - 40
	Nm	... 180
	min⁻¹	... 3000