

DH40GT



For geothermal applications


Für geothermische Anwendungen

Options Optionen

- > Hydraulic Chuck
Hydraulischer Spannkopf
- > Preventer system
Preventersystem

- > Flushing heads 2" & 3"
Spülkopf 2" & 3"
- > Tip Out System
Tip Out System

- > Floating spindle
Floating Spindel

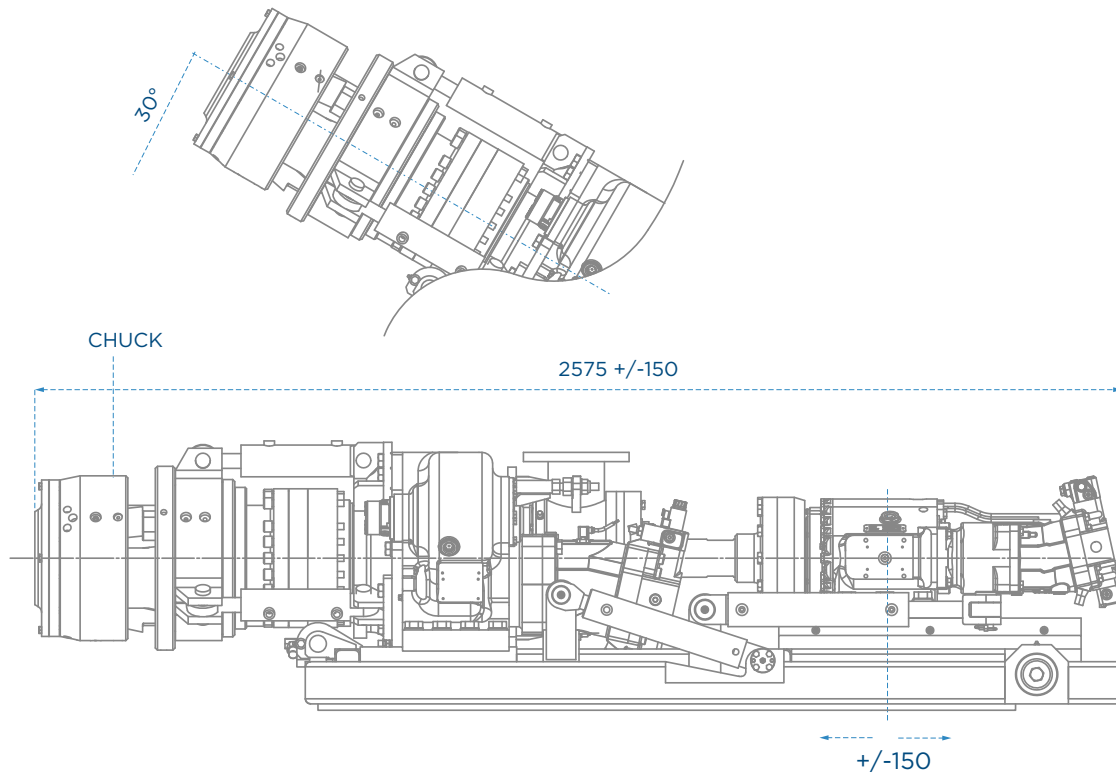


Technical Specifications are subject to modifications without prior notice and incurring responsibility for machines previously sold. The shown machines may have optional equipment. Technical data do not consider power losses. Error misprints reserved. / Technische Änderungen ohne Vorankündigung und Verpflichtung gegenüber früher gelieferten Geräten. Die abgebildeten Geräte können Sonderausstattungen haben. Technische Daten ohne Berücksichtigung des Wirkungsgrades. Irrtum und Druckfehler vorbehalten.




approx. 1850 kg Weight Gewicht · 220 kN Traction Zugkraft

Gear box 1 / Casing RH40X Getriebe 1 / Rohr

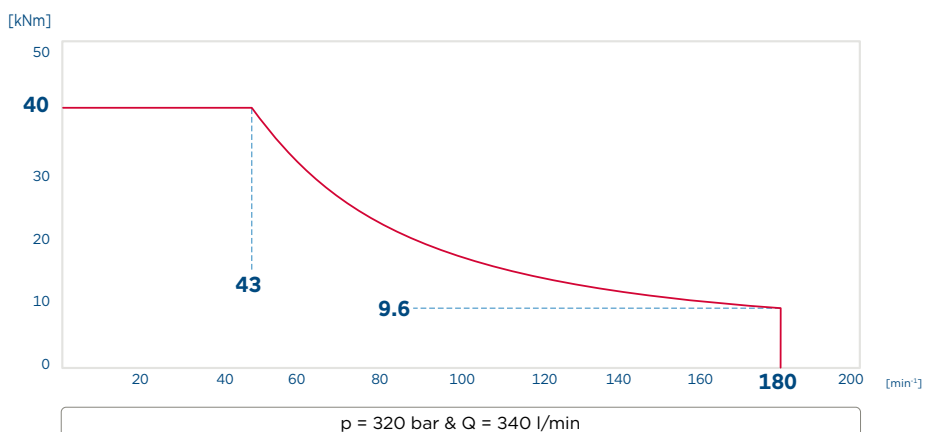

Gear box 2 / Inner rod RH16X Getriebe 2 / Innengestänge

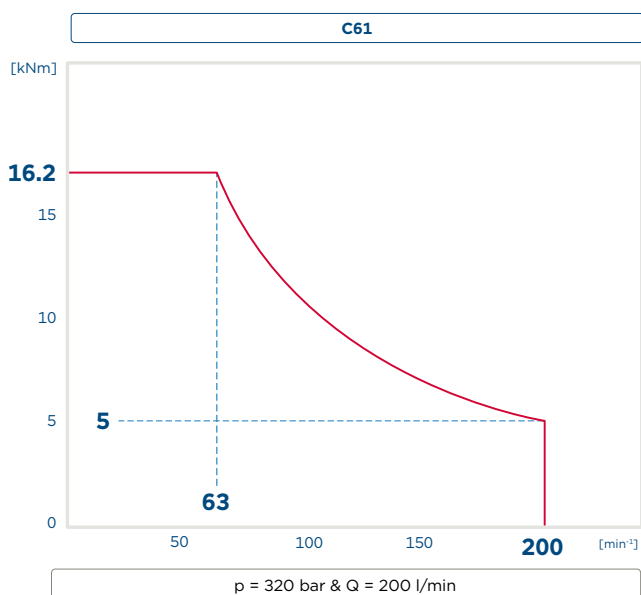

Hydraulic Chuck SK 219 hydraulischer Spannkopf

Clamping range
Spannbereich

mm

... 219

n max

min⁻¹

... 180

M max

kNm

... 40

DOUBLE HEAD
DRILLING SYSTEMS