




RH1X

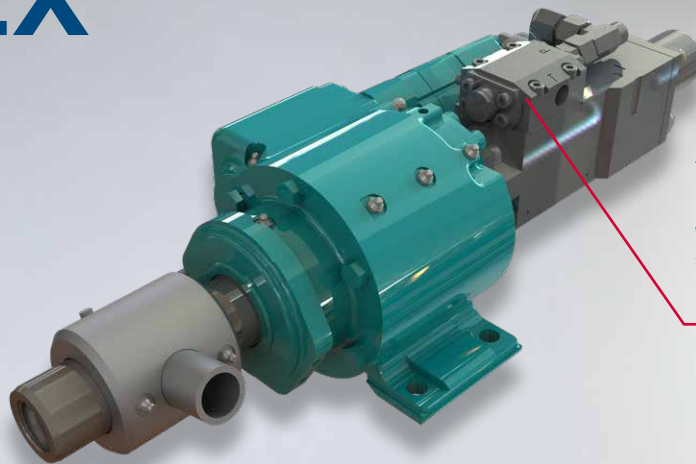

**Available
Percussion frequency
4.000 min⁻¹**
Verfügbare
Schlagfrequenz

Options Optionen

- > Mounting plates
Montageplatten
- > High frequency percussion
Hochfrequentes Schlagwerk
- > Rotation Version
Drehende Version
- > Weight reduced version
Gewichtsreduzierte Version

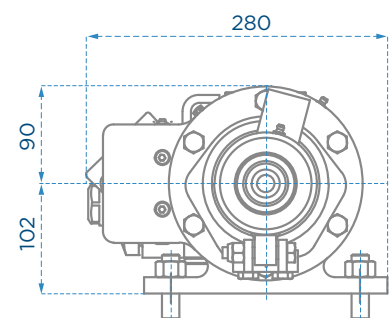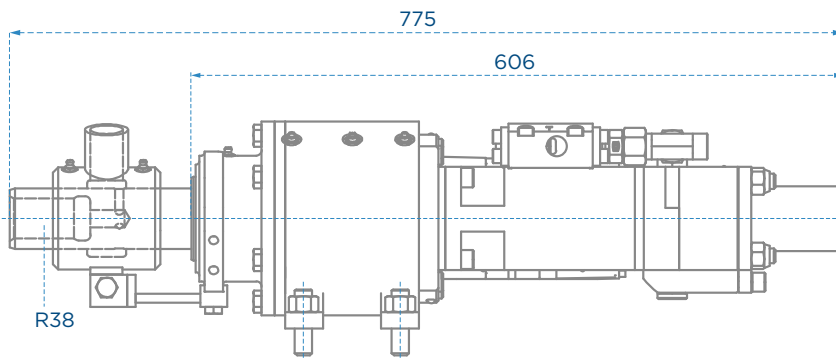

Technical Specifications are subject to modifications without prior notice and incurring responsibility for machines previously sold. The shown machines may have optional equipment. Technical data do not consider power losses. Error misprints reserved. / Technische Änderungen ohne Vorankündigung und Verpflichtung gegenüber früher gelieferten Geräten. Die abgebildeten Geräte können Sonderausstattungen haben. Technische Daten ohne Berücksichtigung des Wirkungsgrades. Irrtum und Druckfehler vorbehalten.



40 – 80 kg Weight Gewicht · 35 kN Traction Zugkraft

Standard motors Standard Motoren

Rotary mechanism RH1X Drehantrieb

Torque Drehmoment Rotation Drehzahl	Motor Type Motor Typ Gear Gang	85 1	87 1	88 1
	Nm min ⁻¹	540 292	860 184	1060 150
p = 200 bar & Q = 50 l/min				

Percussion unit Schlagwerk

Operating pressure Arbeitsdruck Oil capacity Ölmenge Single blow energy Einzelschlagenergie No. of blows Schlagfrequenz	Type Typ	STANDARD	HIGH FREQUENCY
	bar l/min Nm min ⁻¹	140 - 180 25 - 40 ... 180 ... 3000	140 - 180 45 - 55 ... 180 ... 4000

Shank adapters Einsteckenden

- > R44 LH / RH & IB30, IB40 & IB52
- > R32, R38, T38 & T45

Other shank adapters on request
Weitere Einsteckenden auf Anfrage